



GuliKit KingKong Controller

Enjoy gaming easier!

NS08

Thank you for choosing Gulikit products.

Gulikit is a design-driven brand of game accessories.

Everything we do is for breakthroughs and innovations.

We firmly believe in thinking differently and we strive to make gaming easier and more fun.


Everyone can be a hero in their own mind!



 Learning button

 Setting button

Controller automatically shuts down in case of no any button action in 10 minutes.
Controller wakes up by pressing any one of A,B,X,Y and Mode buttons.

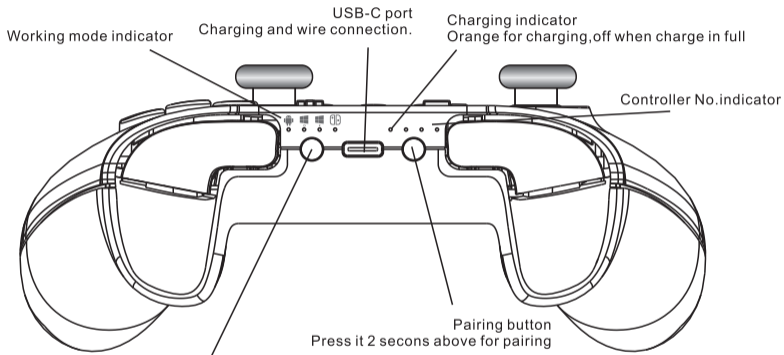

Mode button
Press button 2 seconds above for mode switch
Double clicks for shutdown, one click for power on.



How to pair GuliKit controller with Switch:

1. Go to controller setting on Switch as above photo indicated.
2. Press pairing button on controller 2 seconds and start pairing.
3. Pairing is completed once Switch shows successful connection to new controller.

How to pair GuliKit controller with computer:

1. Hold the mode button on controller to switch it to PC XINPUT or DINPUT mode.
2. Press the pairing button on controller 2 seconds to start pairing with scrolling LED indication.
3. Go to Bluetooth setting on computer and search new device, choose "GuliKit Controller" and connect.
4. Pairing is completed once it shows successful connection to new controller.

It's same way as above to pair GuliKit controller with Android devices.



Learning button

Learning activation: Press learning button 3 seconds to start learning with a vibration, controller will then record all the operations before the button is pressed again to stop or auto stop with a long vibration when time runs up to 10 seconds.

Auto operation: Controller starts auto operation one time for what it has learned by one click of learning button. Double clicks will let it run auto operation continuously. Any button press except the stick will stop auto operation.

+ below means holding the setting button and pressing other buttons.



+

A、**B**、**X**、**Y**、**R1**、**R2**

Repeated shooting

Modes of repeated shooting:

1. 10 seconds Repeated shooting. Hold button to start 10 seconds repeated shooting with one vibration indication and release button to stop.
2. Auto repeated shooting. Press button once to start auto repeated shooting with two vibrations indication and press again to stop.
3. Stop repeated shooting mode with a long vibration indication.



+



A-B,X-Y buttons function switch

Function :

1. Buttons function switch with one vibration indication.
2. Stop buttons function switch with a long vibration indication.



Vibration adjustment

Up for adding vibration, down for reducing vibration.
4 levels vibration adjustment. The lowest level is vibration off.



Clear all current mode Settings.

Long vibration once for clearing completion.

Product specification:

Brand: GuliKit

Product name: KingKong Controller

Part number: NS08

Input port: USB-C

Transmission distance: 10 Meters

Frequency range: 2.402GHZ - 2.480GHZ

Supported Platforms: Switch、PC X-INPUT、PC D-INPUT、Android

Input voltage: 5V

Input current: 500mA



FC

CE

RoHS

Made in China
www.gulikit.com